

| REVISIONS | | 1 |
|-----------|-------------|----------|
| REV | DESCRIPTION | DATE |
| A/0 | ??? | 10/09/27 |

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40° C ~ +105° C
 Contact Material: Brass
 Insulator Material: PBT (UL94V-0)
 Plated (*Standard): Gold flash all over




UNSPECIFIED TOLERANCE: ±0.20mm

Part No. Information:


GL37D03-XX-C-3.0

Series No.
 Number of Contacts
 02 to 40 Contacts plated PC=3.0

- A: Selective Plated
- B: Tin Plated
- * Gold Plated:
 - E: Gold 5u"
 - F: Gold 10u"
 - G: Gold 20u"

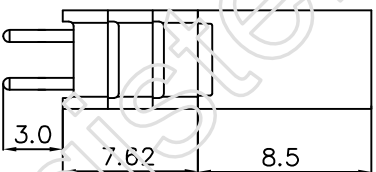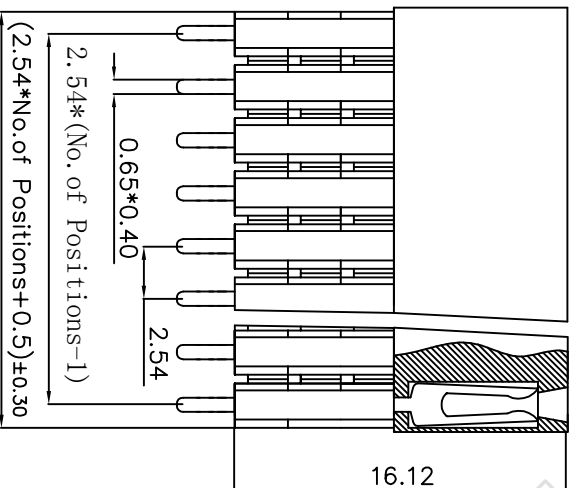

| 名称 | 规格说明 | 材质 |
|----|---|-----|
| 端子 | Pitch:2.54mm Y型端子 L号 G/F | 黄铜 |
| 塑胶 | Pitch: 5068.5mm 297Pin / 2.54*2.54 排母塑胶 | PBT |
| 包装 | PE盘 | |

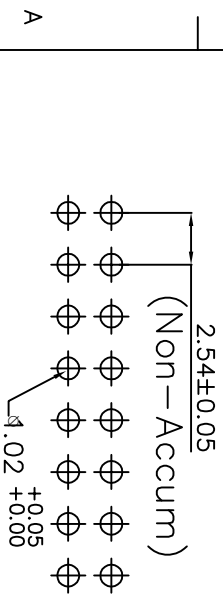

Recommended P.C.B Layout

| | | |
|--------------|---|-------------------------|
| ROHS | GLCONN 吴江世进电子有限公司 | |
| | Pitch: 5.0mm Y型Female Header 180度 2*XXPIN 加三层塑胶 | |
| Customer: XX | DWG.: 100927-001 | Part No. GL37D03-XX-3.0 |
| Approved: | Checked: X | Date: 2010/09/27 |